



High Performance Hub



2020 catalogue

QUANDO
High Performance Hub

QUANTEA®



Welcome to KT world

KT established in 1947,
Taichung, Taiwan

Huaian Factory is established at 2014
and production at 2016.

In order to serve and satisfy more subscribers,
We established the factory in Shenzhen at 1999.

1947

1999

2014 2016

KT holds our Quality Policy *"Be the most valuable supplier in bicycle industry"*.

CONTENTS

01 E-MTB

M5ER / M4ER

02-07 DH/MTB

TWXF / M4TR / MS6F / MS1R / MZ3R
T55F / TM7R / MZ5R / ME6F / ME6R
SN3F / SN3R / MF1F / M4ZR / SN8R / MQ5R

08-09 MTB DISC

T04F / TR8R / MH8F / MR5R
K68F / K68R / TD6R

10-11 MTB V-Brake

C99F / CT1R / SH1F / SH3R
A15F / AYER / A12R

12 MTB Steel

122F / 103F / 122R

13 GRAVAL BIKE

XF1F / XF1R / MSCF / SNCR

14 CYCLECROSS BIKE

XA2F / XA2R / XS3F / XS8R

15-17 ROAD

QA1F / QA1R / 599F / CT2R
ZQ1F / QZ1R / 51BF / G5ER
GP5F / C08R / 515F / 512R

18 FIXIE BIKE

DP6F / DP6R / 576F / 513R

19 FOLDING BIKE

A8BF / 588R / A8QF / A86R

20-22 BMX/DIRT JUMP

MHGF / M15R / MBAF / MBAR / M10F / M18R
M18F / M89R / 566F / A89R

23 BMX/RACING

AF1F / MA5R / M6GF / M95R

24 BMX/Freecoaster

350F / 355R / 3V5R

25 BMX/Street

12TF / 12TR / 11TF / 11TR / 104R

26-28 URBAN BIKE

325R / 3A5R / 319R / 305R
762R / 155F / 156F / 16CR / 3D5R

29-31 SPARE PARTS




KT-M5ER 8/9/10/11S

Use: **DH, Boost, E-MTB**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Cr-Mo Cassette 4 Pawls and 1spring**
 Bearing: **Sealed. x 5pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **19 (ID12)*148mm**
 Weight: **461g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **63mm**
 Option: **Exchangable for Sram XD Driver**
KT-M4ER for center lock



Features

- Steel axle and Cr-mo cassette which provides stiffness for the torque carried form central motor
- Cassette with 3 pawls and 3pcs sealed bearings design is fully balancing the engagement that bring stability and durability
- One piece axle and exchangeable cassette for SRAM XD driver for easy maintenance and operation
- Approved by field test and Lab test

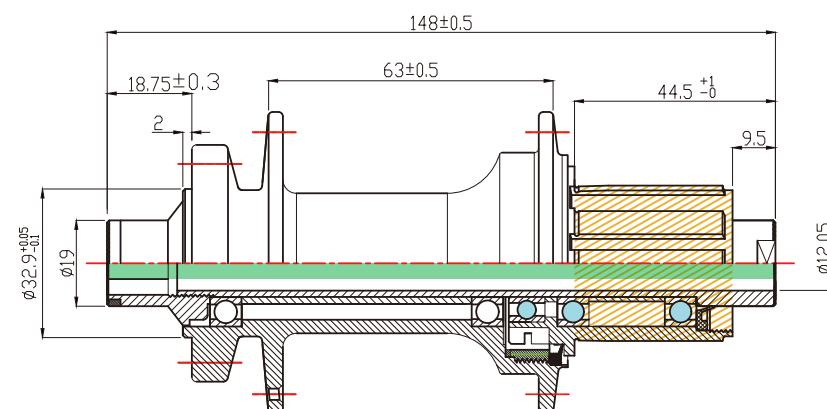

KT-TW XF

Use: **Downhill, Boost**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Bearing: **Sealed. x 2 pcs**
 Axle: **7075 Alloy. Machined**
 Axle Dim: **ID15*110mm**
 Weight: **197g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **64mm**
 Option: **MS6F ID15*110mm**



KT-M4TR 8/9/10/11S

Use: **Downhill, Boost**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Cr-Mo Cassette 4 Pawls and 1spring**
 Bearing: **Sealed. x 4pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **19 (ID12)*148mm**
 Weight: **444g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **63mm**
 Option: **Exchangable for Sram XD Driver**





KT-MS6F

Use: **Downhill, Boost**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Rolling System: **Loose balls**
 Axle: **Cr-Mo steel**
 Axle Dim: **15*110mm**
 Weight: **288g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **64mm**
 Option: **TQ5F ID15*110mm for Center lock w/o lock ring**



KT-MS1R 8/9/10/11S

Use: **Downhill, Freeride**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Cr-Mo Cassette 3 Pawls and 1 Spring**
 Rolling System: **Loose balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **19*(ID12)*142mm**
 Weight: **485g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **63mm**



KT-MZ3R Sram XD 11S For MTB

Use: **Downhill, Freeride**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Cr-Mo Cassette 3 Pawls and 1 Spring**
 Bearing: **Sealed. x 2pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **19 (ID12)*142mm**
 Weight: **457g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **56mm**



KT-T55F

Use: **Freeride, Downhill, Boost**
 Features: **Center lock**
 Body: **Alloy 1 Piece Forged. CNC**
 Bearing: **Sealed. x 2 pcs**
 Axle: **7075 Alloy. Machined**
 Axle Dim: **ID15*110mm**
 Weight: **168g**
 Spoke: **14G. 32,36**
 Flange PCD: **45mm**
 Flange Spacing: **65mm**



KT-TM7R Single Speed

Use: **Urban, Belt system**
 Features: **Center lock**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Cr-Mo Cassette 5 Pawls and 5 springs**
 Bearing: **Sealed. x 4pcs**
 Axle: **7075 Alloy. Machined**
 Axle Dim: **M10*135mm*145mm**
 Weight: **307g**
 Spoke: **14G. 32,36**
 Flange PCD: **L:45mm/R:54mm**
 Flange Spacing: **70mm**
 Option: **Exchangable for ID12*142mm**



KT-MZ5R Single Speed

Use: **Urban, Belt system**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Alloy Cassette 5 Pawls and 5 Spring**
 Bearing: **Sealed*4pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **19(ID12)*142mm**
 Weight: **444g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **78mm**





KT-ME6F

Use: **XC, Freeride, Commuter**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Sealed. x 2 pcs**
 Bearing: **7075 Alloy. Machined**
 Axle Dim: **M9*100mm*108mm**
 Weight: **179g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **L: 58mm**
 Flange Spacing: **57.5mm**
 Option: **Anodized Colors Per Order**



KT-ME6R 8/9/10/11S

Use: **XC, Freeride, Commuter**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Alloy Cassette 5 Pawls & 5spring**
 Bearing: **Sealed. x 4pcs**
 Axle: **7075 Alloy. Machined**
 Axle Dim: **M10*135mm*145mm**
 Weight: **319g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **58mm**
 Flange Spacing: **58mm**
 Option: **Anodized Colors Per Order**



KT-SN3F

Use: **XC, Freeride, Commuter**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Sealed. x 2 pcs**
 Bearing: **Cr-Mo**
 Axle Dim: **M9*100mm*108mm**
 Weight: **252g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **58mm**
 Flange Spacing: **58mm**
 Option: **SN6F w/o CNC Disc Mount and Flange**



KT-SN3R 8/9/10S

Use: **XC, Freeride, Commuter**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Steel Splined 3 Pawls**
 Bearing: **Sealed. x 2pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M10*135mm*145mm**
 Weight: **434g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **58mm**
 Flange Spacing: **55mm**
 Option: **SN6R w/o CNC Disc Mount and Flange**



KT-MF1F

Use: **Freeride, Downhill**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Bearing: **Sealed. x 2 pcs**
 Axle: **7075 Alloy. Machined**
 Axle Dim: **15*100mm**
 Weight: **199g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **57mm**
 Option: **Convertor axle from ID15 to ID 5.2 w/204Y QR MS1F ID15*100mm loose ball TZ5F Center lock type**



KT-M4ZR 8/9/10/11S

Use: **Freeride, Downhill**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Cr-Mo Cassette 3 Pawls and 1 spring**
 Bearing: **Sealed. x 4pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **19 (ID12)*142mm**
 Weight: **440g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **58mm**
 Option: **3 In 1 exchangeable converter axle from ID12 to ID10 or ID 5.2 TZ9R Center lock type**



KT-SN8R 8/9/10S


Use: **Freeride, Downhill**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Cr-Mo Cassette 3 Pawls and 1 Spring**
 Bearing: **Sealed. x 2pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **19(ID12)*142mm**
 Weight: **402g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **55mm**
 Option: **KT-SX8R ID12*148mm w/o thru axle**





KT-MQ5R Sram XD 11S

Use: **Freeride, DH**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Alloy Cassette 5 Pawls and 5 Springs**
 Bearing: **Sealed. x 4pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **15 (ID12)*142mm/
 (ID5.2)M10*135mm*145mm**
 Weight: **362g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **58mm**
 Option: **3 In 1 exchangeable converter axle from ID12 to ID10 or ID 5.2
 Shimano cassette body 11S exchangeable**

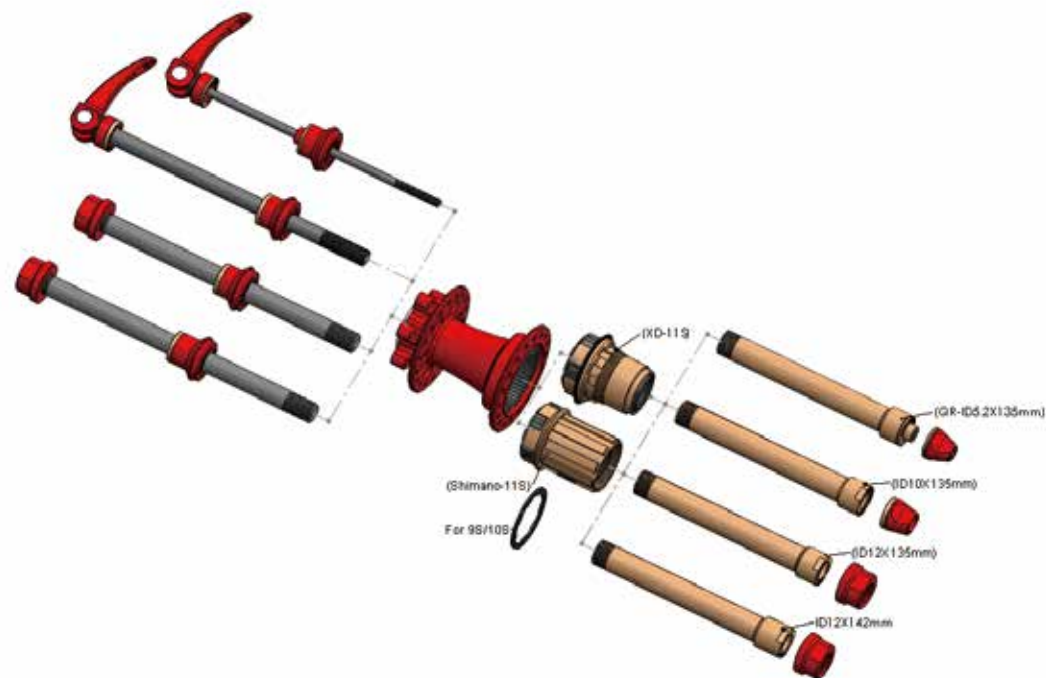

KT-T04F

Use: **XC, Commuter, Urban**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M9*100mm*108mm**
 Weight: **245g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **L: 57mm/R: 45mm**
 Flange Spacing: **53.25mm**



KT-TR8R 8/9/10S

Use: **XC, Commuter, Urban**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Steel Splined 3 Pawls**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M10*135mm*145mm**
 Weight: **441g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **L: 57mm/R: 45mm**
 Flange Spacing: **56.5mm**



KT-MH8F

Use: **XC, Commuter, Urban**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Rolling System: **Rolling System: Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M9*100mm*108mm**
 Weight: **260g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **58mm**
 Flange Spacing: **57.5mm**



KT-MR5R 8/9/10S

Use: **XC, Commuter, Urban**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Steel Splined 3 Pawls**
 Rolling System: **Rolling System: Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M10*135mm*145mm**
 Weight: **463g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **58mm**
 Flange Spacing: **56mm**

**KT-K68F**

Use: **XC, Commuter, Urban**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M9*100mm*108mm**
 Weight: **263g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **58mm**
 Flange Spacing: **53.25mm**
 Option: **K08F w/CNC Disc Mount**
K88F 3/8" Axle

**KT-K68R 8/9/10S**

Use: **XC, Commuter, Urban**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Steel Screwing 2 Pawls**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M10*135mm*145mm**
 Weight: **462g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **57mm**
 Flange Spacing: **56.5mm**
 Option: **K08R w/CNC Disc Mount**
K88R 3/8" Axle
K69R for 11spd

**KT-TD6R 7s**

Use: **XC, Commuter, Urban**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Thread Type**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **3/8"135mm*175mm**
 Weight: **362g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **58mm**
 Flange Spacing: **56.75mm**
 Option: **TD3R-3/8"114mm*170mm 1S**
TDAR-3/8" Axle 8/9S
TD7R-M10 QR Type 7S
TD8R-M10 QR Type 8/9S

**KT-C99F**

Use: **XC, Commuter, Urban**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Bearing: **Sealed. x 2 pcs**
 Axle: **7075 Alloy. Machined**
 Axle Dim: **M9*100mm*108mm**
 Weight: **149g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **40mm**
 Flange Spacing: **75mm**
 Option: **Anodized Colors Per Order**

**KT-CT1R 8/9/10S**

Use: **XC, Commuter, Urban**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Steel Splined 3 Pawls**
 Bearing: **Sealed. x 2pcs**
 Axle: **7075 Alloy. Machined**
 Axle Dim: **M10*135mm*145mm**
 Weight: **377g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **45mm**
 Flange Spacing: **57mm**
 Option: **CT3R-3/8" Axle**

**KT-SH1F**

Use: **Economic XC, Commuter, Urban**
 Features: **V-Brake**
 Body: **Body: Alloy 1 Piece Forged. CNC**
 Rolling System: **Rolling System: Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M9*100mm*108mm**
 Weight: **162g**
 Spoke: **14G. 24,28,32,36**
 Flange PCD: **38mm**
 Flange Spacing: **71.5mm**

**KT-SH3R 8/9/10S**

Use: **XC, Commuter, Urban**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Freewheel: Steel Screwing 2 Pawls**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M10*135mm*145mm**
 Weight: **412g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **45mm**
 Flange Spacing: **58.5mm**





KT-A15F

Use: **Economic XC, Commuter, Urban**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M9*100mm*108mm**
 Weight: **153g**
 Spoke: **14G, 28,32,36**
 Flange PCD: **38mm**
 Flange Spacing: **71.5mm**
 Option: **A55F-Rubber Seal**
A16F-3/8" Axle w/Steel Cap
A56F-3/8" Axle, Rubber Seal
A14F-M9 Solid Axle



KT-AYER 8/9/10S

Use: **XC, Commuter, Urban**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Freewheel: Steel Screwing 2 Pawls**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M10*135mm*145mm**
 Weight: **412g**
 Spoke: **14G, 28,32,36**
 Flange PCD: **45mm**
 Flange Spacing: **58.5mm**
 Option: **AZER-M10 QR Type w/Rubber Seal 8/9/10S**
AZDR-3/8" Axle w/Rubber Seal 8/9/10S
AYDR-3/8" Axle w/Steel Cap 8/9/10S
AY1R-3/8" Axle w/Steel Cap 7S
AZ1R-3/8" Axle w/Rubber Seal 7S
AZ2R-M10 QR Type w/Rubber Seal 7S
AY2R-M10 QR Type w/Steel Cap 7S



KT-A12R 6/7S

Use: **Economic XC, Commuter, Urban**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Thread Type**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M10*135mm*145mm**
 Weight: **257g**
 Spoke: **14G, 24,28,32,36**
 Flange PCD: **45mm**
 Flange Spacing: **57mm**
 Option: **A11R-3/8" Axle 6/7S**
A13R-3/8" Axle Single Speed
A1HR-3/8" Axle 8S
A1ER-M10 QR Type 8S
A51R-3/8" Axle w/Rubber Seal 6/7S
A52R-M10 QR Type w/Rubber Seal 6/7S
A5ER-M10 QR Type w/Rubber Seal 8S



KT-122F

Use: **Economic, Commuter, Urban**
 Features: **V-Brake**
 Body: **Steel**
 Rolling System: **Balls Retainer**
 Axle: **S45C Steel**
 Weight: **250g**
 Spoke: **14G, 16,20,28,36**
 Flange PCD: **38mm**
 Flange Spacing: **69mm**
 Option: **122FQR-M9 QR Type Cr-Mo Axle**
132F 48H



KT-103F

Use: **Economic, Kids (<= 20")**
 Features: **V-Brake**
 Body: **Steel**
 Rolling System: **Balls Retainer**
 Axle: **S45C Steel**
 Axle Dim: **5/16"*83mm*120mm**
 Weight: **178g**
 Spoke: **14G, 16,20,28**
 Flange PCD: **34mm**
 Flange Spacing: **64mm**
 Option: **104F-Flange Space 74mm**
183F-3/8" Axle Flange Space 64mm
134F-3/8" Axle Flange Space 74mm



KT-122R 6/7S

Use: **Economic, Commuter, Urban**
 Features: **V-Brake**
 Body: **Steel**
 Freewheel: **Thread Type**
 Rolling System: **Balls Retainer**
 Axle: **S45C Steel**
 Axle Dim: **3/8"*135mm*175mm**
 Weight: **385g**
 Spoke: **14G, 16,20,28,36**
 Flange PCD: **45mm**
 Flange Spacing: **56mm**
 Option: **122RQR-M10 QR Type Cr-Mo Axle**
132R 48H





KT-XF1F-12

Use: Freeride, Gravel bike
 Features: Disc Brake Mount
 Body: Alloy 1 Piece Forged. CNC
 Bearing: Sealed. x 2 pcs
 Axle: 7075 Alloy. Machined
 Axle Dim: $\varnothing 12 \times 100\text{mm}$
 Weight: 69g
 Spoke: 14G. 32,36
 Flange PCD: R:58mm/L:45mm
 Flange Spacing: 58mm
 Option: KT-XF1F ID15*100mm



KT-XF4R 11S

Use: Freeride, Gravel bike
 Features: Disc Brake Mount
 Body: Alloy 1 Piece Forged. CNC
 Freewheel: Cr-Mo Cassette 3 Pawls and 1 spring
 Bearing: Sealed. x 4 pcs
 Axle: Cr-Mo Steel
 Axle Dim: 19 (ID12)*142mm
 Weight: 377g
 Spoke: 14G. 32,36
 Flange PCD: R:58mm/L:48mm
 Flange Spacing: 57mm



KT-MSCF

Use: Freeride, Gravel bike
 Features: Disc Brake Mount
 Body: Alloy 1 Piece Forged. CNC
 Bearing: Loose balls
 Axle: Cr-Mo Steel
 Axle Dim: $\varnothing 12 \times 100\text{mm}$
 Weight: 244g
 Spoke: 14G. 32,36
 Flange PCD: R:58mm/L:45mm
 Flange Spacing: 58mm
 Option: KT-MSEF center lock model



KT-SNCR 11S

Use: Freeride, Gravel bike
 Features: Disc Brake Mount
 Body: Alloy 1 Piece Forged. CNC
 Freewheel: Cr-Mo Cassette 3 Pawls and 1 spring
 Bearing: Loose balls
 Axle: Cr-Mo Steel
 Axle Dim: 19 (ID12)*142mm
 Weight: 433g
 Spoke: 14G. 32,36
 Flange PCD: R:58mm/L:48mm
 Flange Spacing: 57mm
 Option: KT-SNDR center lock model



KT-XA2F

Use: Road, Commuter, Urban, Cyclocross
 Features: Disc Brake Mount
 Body: Alloy 1 Piece Forged. CNC
 Bearing: Sealed. x 2 pcs
 Axle: 7075 Alloy Machined
 Axle Dim: $\text{M}9 \times 100\text{mm} \times 108\text{mm}$
 Weight: 150g
 Spoke: 14G. 28,32,36
 Flange PCD: L:58mm/R:45mm
 Flange Spacing: 57.5mm
 Option: Anodized Colors Per Order



KT-XA2R 8/9/10S

Use: Road, Commuter, Urban, Cyclocross
 Features: Disc Brake Mount
 Body: Alloy 1 Piece Forged. CNC
 Freewheel: Alloy cassette 3 Pawls and 3 Springs
 Bearing: Sealed. x 4 pcs
 Axle: 7075 Alloy Machined
 Axle Dim: $\text{M}10 \times 130\text{mm} \times 140\text{mm}$
 Weight: 280g
 Spoke: 14G. 28,32,36
 Flange PCD: L: 58mm/R: 45mm
 Flange Spacing: 52mm
 Option: XA5R-OLD 135mm*145mm
 XC5R Shimano 11s



KT-XS3F

Use: Road, Commuter, Urban
 Features: Disc Brake Mount
 Body: Alloy 1 Piece Forged. CNC
 Bearing: Loose Balls
 Axle: Cr-Mo Steel
 Axle Dim: $\text{M}9 \times 100\text{mm} \times 108\text{mm}$
 Weight: 228g
 Spoke: 14G. 28,36
 Flange PCD: 58mm
 Flange Spacing: 57.5mm
 Option: Anodized Colors Per Order



KT-XS8R 11S

Use: Road, Commuter, Urban
 Features: Disc Brake Mount
 Body: Alloy 1 Piece Forged. CNC
 Freewheel: Steel Splined 3 Pawls
 Rolling System: Rolling System: Loose Balls
 Axle: Cr-Mo Steel
 Axle Dim: $\text{M}10 \times 135\text{mm} \times 145\text{mm}$
 Weight: 431g
 Spoke: 14G. 24,28,36
 Flange PCD: 58mm
 Flange Spacing: 52mm
 Option: XS3R $\text{M}10 \times 130 \times 140$ 8/9/10spd
 XS9R $\text{M}10 \times 130 \times 140$ 11spd





KT-QA1F

Use: Road, Commuter, Urban
 Features: V-Brake
 Body: Alloy 1 Piece Forged. CNC
 Bearing: Bearing: Sealed. x 2 pcs
 Axle: 7075 Alloy. Machined
 Axle Dim: M9*100mm*108mm
 Weight: 79g
 Spoke: 14G. 20,24,28
 Flange PCD: 34mm
 Flange Spacing: 74mm
 Option: Anodized Colors Per Order



KT-QA1R 8/9/10/11S

Use: Road, Commuter, Urban
 Features: V-Brake
 Body: Alloy 1 Piece Forged. CNC
 Freewheel: Freewheel: Alloy Cassette 3 Pawls and 3 Springs
 Bearing: Sealed. x 4pcs
 Axle: 7075 Alloy. Machined
 Axle Dim: M10*130mm*140mm
 Weight: 255g
 Spoke: 14G. 24,28
 Flange PCD: 48mm
 Flange Spacing: 57mm
 Option: QB1R-Bearing x 2pcs w/Steel Splined Type 3 Pawls
 Anodized Colors Per Order



KT-599F

Use: Road, Commuter, Urban
 Features: V-Brake
 Body: Alloy 1 Piece Forged. CNC
 Bearing: Sealed. x 2 pcs
 Axle: 7075 Alloy. Machined
 Weight: 125g
 Spoke: 14G. 24,28,36
 Flange PCD: 40mm
 Flange Spacing: 74mm
 Option: Anodized Colors Per Order



KT-GT2R 11S

Use: Road, Commuter, Urban
 Features: V
 Body: Alloy 1 Piece Forged. CNC
 Freewheel: Steel Splined 3 Pawls
 Bearing: Sealed. x 2pcs
 Axle: 7075 Alloy. Machined
 Axle Dim: M10*130mm*140mm
 Weight: 363g
 Spoke: 14G. 28,32,36
 Flange PCD: 46mm
 Flange Spacing: 50mm
 Option: Anodized Colors Per Order

-Brake



KT-QZ1F

Use: Road, Commuter, Urban
 Features: V-Brake
 Body: Alloy 1 Piece Forged. CNC
 Rolling System: Loose Balls
 Axle: Cr-Mo Steel
 Axle Dim: M9*100mm*108mm
 Weight: 143g
 Spoke: 14G. 24,28,32
 Flange PCD: 40mm
 Flange Spacing: 74mm



KT-QZ1R 11S

Use: Road, Commuter, Urban
 Features: V-Brake
 Body: Alloy 1 Piece Forged. CNC
 Freewheel: Steel Splined 3 Pawls
 Rolling System: Loose Balls
 Axle: Cr-Mo Steel
 Axle Dim: M10*130mm*140mm
 Weight: 368g
 Spoke: 14G. 28,32
 Flange PCD: 45mm
 Flange Spacing: 57mm



KT-51BF

Use: Road, Commuter, Urban
 Features: V-Brake
 Body: Alloy 1 Piece Forged. CNC
 Rolling System: Burnished Loose Balls
 Axle: Cr-Mo Steel
 Axle Dim: M9*100mm*108mm
 Weight: 155g
 Spoke: 14G. 24,28
 Flange PCD: 40mm
 Flange Spacing: 74mm
 Option: Anodized Colors Per Order



KT-G5ER 8/9/10S

Use: Road, Commuter, Urban
 Features: V-Brake
 Body: Alloy 1 Piece Forged. CNC
 Freewheel: Freewheel: Steel Screwing 2 Pawls
 Rolling System: Loose Balls
 Axle: Cr-Mo Steel
 Axle Dim: M10*130mm*140mm
 Weight: 415g
 Spoke: 14G. 24,28,32,36
 Flange PCD: 45mm
 Flange Spacing: 57mm
 Option: G1ER-w/Steel Cap 8/9/10S
 G12R-w/Steel Cap 7S
 G52R-w/Rubber Seal 7S
 GTER 11spd





KT-GP5F

Use: Road, Commuter, Urban
 Features: V-Brake
 Body: Alloy 1 Piece Forged. CNC
 Rolling System: Burnished Loose Balls
 Axle: Cr-Mo Steel
 Axle Dim: M9*100mm*108mm
 Weight: 125.5g
 Spoke: 14G. 24,28
 Flange PCD: 34mm
 Flange Spacing: 72mm
 Option: G15F-Steel Dust Cap
 G55F-Rubber Seal



KT-C08R Campy 11S

Use: CAMPY Road, Commuter, Urban,
 Features: V-Brake
 Body: Alloy 1 Piece Forged. CNC
 Freewheel: Steel Splined 3 Pawls
 Rolling System: Loose Balls
 Axle: Cr-Mo Steel
 Axle Dim: M10*130mm*140mm
 Weight: 441g
 Spoke: 14G. 32,36
 Flange PCD: 51.5mm
 Flange Spacing: 57.6mm



KT-515F

Use: Economic Road, Commuter, Urban
 Features: V-Brake
 Body: Alloy 1 Piece Forged. CNC
 Rolling System: Loose Balls
 Axle: Cr-Mo Steel
 Axle Dim: M9*100mm*108mm
 Weight: 148g
 Spoke: 14G. 24,28,36
 Flange PCD: 40mm
 Flange Spacing: 74mm
 Option: 516F-3/8" Axle w/Steel Cap
 566F-3/8" Axle w/Rubber Seal



KT-512R 6/7S

Use: Economic Road, Commuter, Urban
 Features: V-Brake
 Body: Alloy 1 Piece Forged. CNC
 Freewheel: Thread Type
 Rolling System: Loose Balls
 Axle: Cr-Mo Steel
 Axle Dim: M10*130mm*140mm
 Weight: 251g
 Spoke: 14G. 28,32,36
 Flange PCD: 45mm
 Flange Spacing: 57mm
 Option: 511R-3/8 Axle 6/7S
 513R-3/8 Axle Single Speed
 551R-3/8 Axle w/Rubber Seal 6/7S
 552R-M10 QR Type w/Rubber Seal 6/7S



KT-DP6F

Use: Fixie, Track, Commuter
 Features: High Flange
 Body: Alloy 1 Piece Forged. CNC
 Bearing: Bearing: Sealed. x 2 pcs
 Axle: Cr-Mo Steel
 Axle Dim: 3/8"*100mm*140mm
 Weight: 290g
 Spoke: 14G. 28,32,36
 Flange PCD: 62.5mm
 Flange Spacing: 70.5mm
 Option: DP7F-Loose Balls
 DPBF-Loose Balls w/o CNC Flange
 DS9F-Loose Balls M9 Solid Axle
 DP5F-M9 QR Type
 DK6F-Bolts Type



KT-DP6R Single Speed

Use: Fixie, Track, Commuter
 Features: High Flange
 Body: Alloy 1 Piece Forged. CNC
 Freewheel: Thread Type L: Double Thread/R: B.C. 1.37*24T
 Bearing: Sealed. x 2 pcs
 Axle: Cr-Mo Steel
 Axle Dim: 3/8"*120mm*160mm
 Weight: 421g
 Spoke: 14G. 28,32,36
 Flange PCD: 62.5mm
 Flange Spacing: 67mm
 Option: DP7R-Loose Balls
 DPBR-Loose Balls w/o CNC Flange
 DS9R-Loose Balls M10 Solid Axle
 DP5R-M10 QR Type
 DK6R-Bolts Type



KT-576F

Use: Fixie, Track, Commuter
 Features: Low Flange
 Body: Alloy 1 Piece Forged. CNC
 Bearing: Sealed. x 2 pcs
 Axle: Cr-Mo Steel
 Axle Dim: 3/8"*100mm*140mm
 Weight: 218g
 Spoke: 14G. 24,28,32,36
 Flange PCD: 40mm
 Flange Spacing: 74mm
 Option: 566F-Loose Balls



KT-513R Single Speed

Use: Use: Fixie, Track, Commuter
 Features: Features: Low Flange
 Body: Body: Alloy 1 Piece Forged. CNC
 Bearing: Freewheel: Thread Type
 L: Double Thread/R: B.C. 1.37*24T
 Axle: Bearing: Sealed. x 2 pcs
 Axle Dim: Axle: Cr-Mo Steel
 Weight: Weight: 288g
 Spoke: Spoke: 14G. 28,32,36
 Flange PCD: Flange PCD: 45mm
 Flange Spacing: Flange Spacing: 57mm
 Option: Option: 5J3R-Loose Balls





KT-A8BF

Use: **Folding, Kids, Alternative**
 Features: **Caliper-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Bearing: **Sealed. x 2 pcs**
 Axle: **7075 Alloy. Machined**
 Axle Dim: **M9*74mm*82mm**
 Weight: **73g**
 Spoke: **14G. 24,28**
 Flange PCD: **34mm**
 Flange Spacing: **50mm**
 Option: **A5BF M9*65mm*73mm**



KT-588R Single Speed

Use: **Folding, Kids, Alternative**
 Features: **Caliper-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **9T Driver*2 Pawls**
 Bearing: **Sealed. x 4pcs**
 Axle: **CrMo Steel**
 Axle Dim: **3/8"*80mm*118mm**
 Weight: **278g**
 Spoke: **14G. 24,28**
 Flange PCD: **45mm**
 Flange Spacing: **48mm**
 Option: **Anodized Colors Per Order**



KT-A8QF

Use: **Folding, Kids, Alternative**
 Features: **Caliper-Brake M6 Bolt Type**
 Body: **Alloy 1 Piece Forged. CNC**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M10*83mm*91mm**
 Weight: **140g**
 Spoke: **14G. 24,28**
 Flange PCD: **40mm**
 Flange Spacing: **50mm**
 Option: **A86F-3/8" Axle**
A85F-M9 QR Type



KT-A86R Single Speed

Use: **Folding, Kids, Alternative**
 Features: **Caliper-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **11T Driver*2 Pawls**
 Rolling System: **Loose Balls**
 Axle: **S45C Steel**
 Axle Dim: **3/8"*85mm*130mm**
 Weight: **395g**
 Spoke: **14G. 24,28**
 Flange PCD: **45mm**
 Flange Spacing: **48mm**
 Option: **A8QR M6 Bolt Type**



KT-MHGF

Use: **XC, Freeride, Commuter**
 Features: **Disc Brake Mount M6 Bolt Type**
 Body: **Alloy 1 Piece Forged. CNC**
 Bearing: **Sealed. x 2 pcs**
 Axle: **7075 Alloy. Machined**
 Axle Dim: **M9*100mm*108mm**
 Weight: **237g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **58mm**
 Flange Spacing: **57.5mm**
 Option: **Anodized Colors Per Order**



KT-MI5R Single Speed

Use: **DH, XC, Freeride, Commuter**
 Features: **Disc Brake Mount**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Freehub body* 5Pawls and 5 Spring w/12T~18T cog**
 Bearing: **Sealed. x 4pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **3/8"*135mm*175mm**
 Weight: **498g**
 Spoke: **14G. 32,36**
 Flange PCD: **58mm**
 Flange Spacing: **75.5mm**





KT-MBAF

Use: **Street, Vert**
 Features: **Bolt Nut Type**
 Body: **Alloy 1 Piece Forged. CNC**
 Bearing: **Sealed. x 2 pcs**
 Axle: **7075 Alloy. Machined**
 Axle Dim: **3/8"×24T Axle Bolts*100mm**
 Weight: **224g**
 Spoke: **14G. 32,36**
 Flange PCD: **45mm**
 Flange Spacing: **65mm**
 Option: **MBJF-Cr-Mo 3/8"×24T Axle Bolts*100mm**



KT-MBAR Single Speed

Use: **Street, Vert**
 Features: **One-Piece Driver W/Bolt Nut Type**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Freewheel: 9T Driver*4 Pawls**
 Bearing: **Sealed. x 5pcs**
 Axle: **7075 Alloy. Machined**
 Axle Dim: **M14 (3/8"×24T Axle Bolts)*110mm*120mm**
 Weight: **391g**
 Spoke: **14G. 32,36**
 Flange PCD: **L: 51.5mm/R:57mm**
 Flange Spacing: **57mm**
 Option: **MBCR-Cr-Mo Axle**



KT-MIOF

Use: **Street, Freestyle**
 Features: **Bolt Nut type**
 Body: **Alloy 1 Piece Forged. CNC**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **3/8"×24T Axle Bolts*100mm**
 Weight: **224g**
 Spoke: **14G. 32,36**
 Flange PCD: **45mm**
 Flange Spacing: **Flange Spacing: 65mm**
 Option: **Anodized Colors Per Order**



KT-MI8R Single Speed

Use: **Street, Vert**
 Features: **One-Piece Driver W/Bolt Nut Type**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **9T Driver*4 Pawls**
 Rolling System: **Loose Balls+1 Seal Bearing**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M14 (3/8"×24T Axle Bolts)*110mm*120mm**
 Weight: **557g**
 Spoke: **14G. 32,36,48**
 Flange PCD: **57mm**
 Flange Spacing: **57mm**
 Option: **Anodized Color Per Order**



KT-M18F

Use: **Street, Freestyle**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M14*100mm*170mm**
 Weight: **364g**
 Spoke: **14G. 36**
 Flange PCD: **45mm**
 Flange Spacing: **72mm**
 Option: **M17F-3/8" Axle**



KT-M89R Single Speed

Use: **Street, Freestyle**
 Features: **One-Piece Driver**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **9T Driver*4 Pawls**
 Rolling System: **Loose Balls+1 Seal Bearing**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M14*110mm*180mm**
 Weight: **648g**
 Spoke: **14G. 36,48**
 Flange PCD: **57mm**
 Flange Spacing: **57mm**
 Option: **M83R-3/8" Axle**



KT-566F

Use: **Street, Freestyle**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Rolling System: **Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **3/8"×100mm*160mm**
 Weight: **155g**
 Spoke: **14G. 24,28,36**
 Flange PCD: **40mm**
 Flange Spacing: **74mm**
 Option: **516F-3/8" Axle w/Steel Cap**



KT-A89R Single Speed

Use: **Street, Freestyle**
 Features: **One-Piece Driver**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **9T Driver*3 Pawls**
 Rolling System: **Loose Balls+1 Seal Bearing**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M14*110mm*160mm/175mm**
 Weight: **538g**
 Spoke: **14G. 36**
 Flange PCD: **52mm**
 Flange Spacing: **57mm**
 Option: **KT-ADJR Seal Bearing Type**
KT-ABJR Seal Bearing Bolt Type





KT-AF1F

Use: **BMX Race**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Bearing: **Sealed. x 2 pcs**
 Axle: **7075 Alloy Machined**
 Axle Dim: **ID20*100mm**
 Weight: **151g**
 Spoke: **14G. 32,36**
 Flange PCD: **46mm**
 Flange Spacing: **72mm**
 Option: **Anodized Colors Per Order**



KT-MA5R Single Speed

Use: **BMX Race**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Alloy Cassette 5 Pawls and 5 Springs**
 Bearing: **Sealed. x 5 pcs**
 Axle: **7075 Alloy Machined**
 Axle Dim: **ID15*110mm**
 Weight: **301g**
 Spoke: **14G. 32,36**
 Flange PCD: **58**
 Flange Spacing: **58**
 Option: **Anodized Colors Per Order**



KT-M6GF

Use: **BMX (Race), Street**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Bearing: **Sealed. x 2 pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **3/8"*100mm*140mm**
 Weight: **269g**
 Spoke: **14G. 28,32,36**
 Flange PCD: **38mm**
 Flange Spacing: **67mm**
 Option: **Anodized Colors Per Order**



KT-M95R Single Speed

Use: **Street, Freestyle, Racing**
 Features: **Cassette Single Speed**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Steel 4 Pawls, 12T-18T Cogs**
 Bearing: **Sealed. x 4 pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M14*110mm*175mm**
 Weight: **522g**
 Spoke: **14G. 36H**
 Flange PCD: **46mm**
 Flange Spacing: **57.4mm**
 Option: **M98R-3/8" Axle**
M9ER-M6 Bolts Type



KT-350F

Use: **Street, Freestyle**
 Features: **V-Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Rolling System: **Rolling System: Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M14*100mm*170mm**
 Weight: **466g**
 Spoke: **14G. 36,48**
 Flange PCD: **45mm**
 Flange Spacing: **71mm**
 Option: **330F-3/8" Axle**



KT-355R Single Speed

Use: **Street, Flatland, Commuter, Alternative**
 Features: **Free coaster driver**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **Freewheel: Sprocket 14T/16T**
 Rolling System: **Rolling System: Loose Balls**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M14*110mm*170mm**
 Weight: **740g**
 Spoke: **14G. 36,48**
 Flange PCD: **51.5mm**
 Flange Spacing: **59mm**
 Option: **335R-3/8" Axle**



KT-3V5R Single Speed

Use: **Street, Flatland, Commuter, Alternative**
 Features: **Free coaster**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **One-piece driver 9T**
 Bearing: **Sealed. x 4 pcs**
 Axle: **Cr-Mo Steel**
 Axle Dim: **M14*110mm*175mm**
 Weight: **698g**
 Spoke: **14G. 36**
 Flange PCD: **58mm**
 Flange Spacing: **60mm**
 Option: **Anodized Colors Per Order**





KT-12TF

Use: **Economic Street, Freestyle**
 Features: **Nut Type**
 Body: **Steel**
 Rolling System: **Balls Retainer**
 Axle: **S45C Steel**
 Axle Dim: **M14*100mm*165mm**
 Weight: **550g**
 Spoke: **14G. 36,48**
 Flange PCD: **61mm**
 Flange Spacing: **56mm**
 Option: **135F-3/8" Axle**



KT-12TR Single Speed

Use: **Economic Street, Freestyle**
 Features: **Nut Type**
 Body: **Steel**
 Freewheel: **Thread Type**
 Rolling System: **Balls Retainer**
 Axle: **S45C Steel**
 Axle Dim: **M14*110mm*165mm**
 Weight: **514g**
 Spoke: **14G. 36,48**
 Flange PCD: **61mm**
 Flange Spacing: **56mm**
 Option: **135R-3/8" Axle**



KT-11TF

Use: **Economic Street, Freestyle**
 Features: **Nut Type**
 Body: **Steel**
 Rolling System: **Balls Retainer**
 Axle: **S45C Steel**
 Axle Dim: **M14*100mm*170mm**
 Weight: **498g**
 Spoke: **14G. 36,48**
 Flange PCD: **45mm**
 Flange Spacing: **54mm**
 Option: **116F-3/8" Axle**



KT-11TR Single Speed

Use: **Economic Street, Freestyle**
 Features: **Nut Type**
 Body: **Steel**
 Freewheel: **Thread Type**
 Rolling System: **Balls Retainer**
 Axle: **S45C Steel**
 Axle Dim: **M14*110mm*175mm**
 Weight: **516g**
 Spoke: **14G. 36,48**
 Flange PCD: **45mm**
 Flange Spacing: **57mm**
 Option: **116R-3/8" Axle**



KT-104R Single Speed

Use: **Economic Street, Freestyle**
 Features: **Nut Type**
 Body: **Steel**
 Freewheel: **M30 Thread Type**
 Rolling System: **Balls Retainer**
 Axle: **S45C Steel**
 Axle Dim: **M14*110mm*175mm**
 Weight: **418g**
 Spoke: **14G. 36**
 Flange PCD: **45mm**
 Flange Spacing: **57mm**
 Option: **106R-3/8" Axle**



KT-325R 2sp

Use: **Cruiser, Commuter, Kids, Urban,**
 Features: **Internal 2 spd Coaster Brake**
 Body: **Steel**
 Freewheel: **8T/20T/22T sprocket**
 Rolling System: **Balls Retainer**
 Axle: **Cr-Mo Steel**
 Axle Dim: **3/8"*112mm*155mm**
 Weight: **1323g**
 Spoke: **14G. 36**
 Flange PCD: **63mm**
 Flange Spacing: **55mm**
 Option: **1:1.3**
 Shift Angle: **Shift Angle: 45-60**
 Brake Angle: **60-75**



KT-3A5R Single Speed

Use: **Cruiser, Commuter, Urban**
 Features: **Aolly Coaster Brake**
 Body: **Alloy 1 Piece Forged. CNC**
 Freewheel: **14T/16T/18T/20T/22T sprocket**
 Rolling System: **Balls Retainer**
 Axle: **Cr-Mo Steel**
 Axle Dim: **3/8"*110mm*167mm**
 Weight: **744g**
 Spoke: **14G. 32,36**
 Flange PCD: **51.5mm**
 Flange Spacing: **59mm**
 Option: **Anodized Colors Per Order**



KT-319R Single Speed


Use: **4" wide tire, Chopper, Urban, Alternative**
 Features: **Coaster Brake**
 Body: **Steel**
 Freewheel: **14T/16T/18T**
 Rolling System: **Balls Retainer**
 Axle: **Cr-Mo Steel**
 Axle Dim: **3/8"*24T*170mm*210mm**
 Weight: **1110g**
 Spoke: **14G. 36**
 Flange PCD: **51.5mm**
 Flange Spacing: **101.3mm**





KT-305R Single Speed

- Use: Cruiser, Kids, Commuter, Urban
Features: Coaster Brake
Body: Steel
Freewheel: 14T/16T/18T/20T/22T sprocket
Rolling System: Balls Retainer
Axle: Cr-Mo/S45C Steel
Axle Dim: 3/8"*110mm*167mm
Weight: 766g
Spoke: 14G. 16,20,28,32,36
Flange PCD: 51.5mm
Flange Spacing: 47.7mm
Option:
305RA For Beach Cruisers 847.5g
Cr-Mo Axle 10/12/13/14G*32/36/40H
305RB For BMX/Kids Bike
S45C Axle 846g 14G*12/16/20/28H
305RC For Plastic Wheel
S45C Axle 14G*3/6H

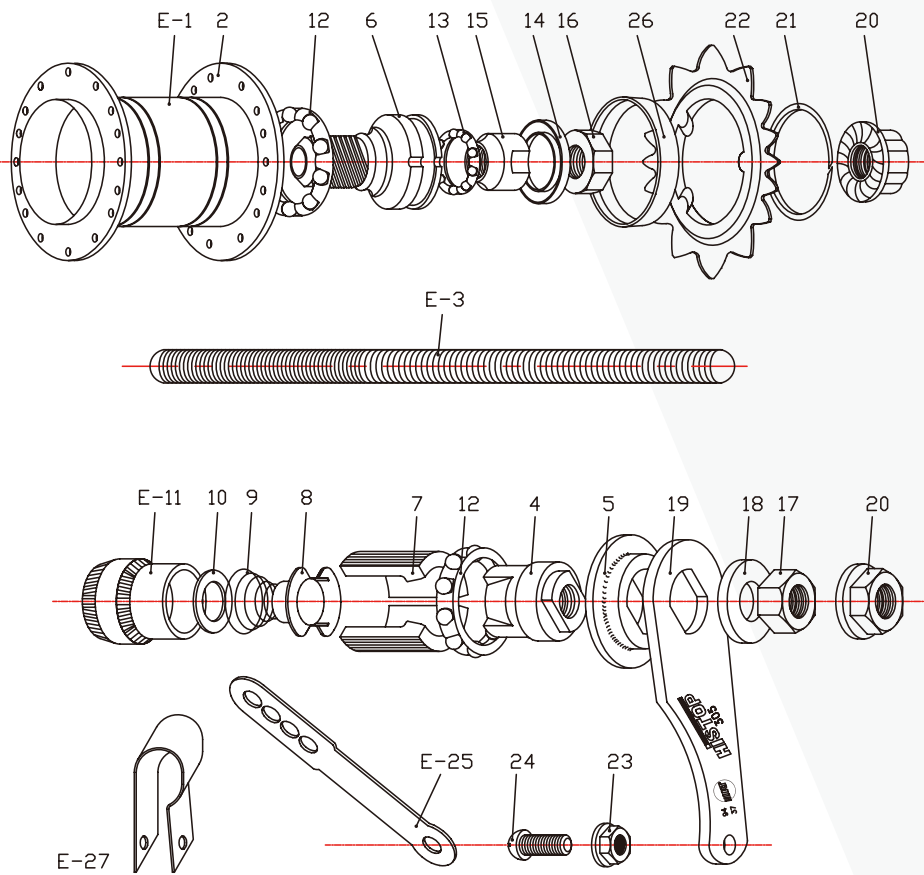

PART NO.	DESCRIPTION
E-1	SHELL
E-2	FLANGE
E-3	AXLE
E-4	BRAKE CONE
E-5	DUST CAP
E-6	DRIVER
E-7	DRAKE SHOE
E-8	SPRING HOLDER
E-9	CLUTCH SPRING
E-10	CLUTCH WASHER
E-11	CLUTCH CONE
E-12	BALL RETAINER 7/32" x 9pcs
E-13	BALL RETAINER 1/4" x 7pcs
E-14	CONE COVER
E-15	CONE
E-16	LOCK NUT (A) 17x 7mm
E-17	LOCK NUT (A) 17x 9mm
E-18	WASHER
E-19	BRAKE ARM
E-20	FLANGE NUT 3/8" x 24T
E-21	LOCK RING
E-22	SPROCKET 14T, 16T, 18T, 19T, 20T, 22T
E-23	CLIP NUT
E-24	CLIP SCREW
E-25	ARM CLIP
E-26	DUST CAP
E-27	DENG ARM CLIP



KT-155F

- Use: Adult Tricycle
Features: Hub Shell
Body: Steel
Bearing: Sealed. x 2pcs
Weight: 161g
Spoke: 14G.28,36
Flange PCD: 42mm
Flange Spacing: 70mm




KT-762R

- Use: UAdult Tricycle
Features: Axle Set
Freewheel: 22T Sprocket Single Speed
Bearing: Bearing: Sealed. x 4pcs
Axle Dim: M16.8*762mm
Weight: 2491g
Spoke: 14G. 28,36
Flange PCD: 42mm
Flange Spacing: 70mm

KT-156F

- Use: Adult Tricycle
Features: Hub Shell
Body: Steel
Weight: 127g
Spoke: 14G. 28,36
Flange PCD: 42mm
Flange Spacing: 70mm

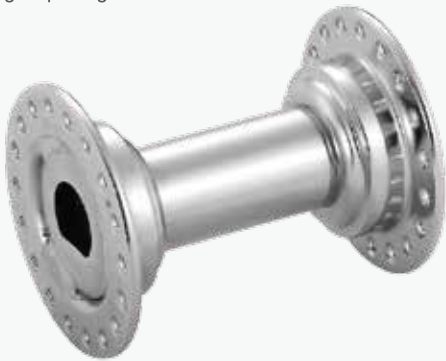

KT-16CR Single Speed

- Use: Adult Tricycle
Body: Steel
Rolling System: Balls Retainer
Axle: S45C Steel
Axle Dim: 3/8"*124mm*175mm
Weight: 685g



KT-3D5R Single Speed

- Use: Adult Tricycle
Body: Steel
Rolling System: Balls Retainer
Axle: Cr-Mo Steel
Axle Dim: 3/8"*110mm*160mm
Weight: 690g



204H/205H

Weight:50.5g/56.5g



204L/205L

Weight:56g/60g



KT-205R
KT-205S
KT-205B

thread 18mm*M12x1.5 w/nut / Shimano type
thread 20mm*M12x1.0 w/nut / Syntance type
thread 20mm*M12x1.75 / Sram type

ID12 for Downhill rear hub
Weight:88g/86g/81g



204B

Weight:110g



MODEL	OLD	PITCH	B±1	THREAD LENGTH	WITH NUT	SYSTEM
ROAD	100	M12*P1.5	120	12	-	-
		M12*P1.5	121.5	13.5	-	SHIMANO
		M12*P1.5	125	16	-	SRAM
		M15*P1.5	125	16	-	SRAM
MTB	142	M12*P1.5	163.5	13.5	-	SHIMANO
		M12*P1.5	165	18	-	SHIMANO
		M12*P1.0	166	20	Y	SYNTACE
		M12*P1.0	166	20	-	DT SWISS
		M12*P1.75	167	20	-	SRAM
		M12*P1.5	170	18	Y	SHIMANO
		M12*P1.5	172	18	Y	SHIMANO
		M12*P1.75	174	20	-	SRAM
		M12*P1.5	178	18	Y	SHIMANO
		M12*P1.75	180	20	-	SRAM
FAT BIKE	150	M15*P1.5	199	12	-	ROCKSHOX
	197	M12*P1.5	227	18	Y	SHIMANO
MTB	100	M12*P1.75	229	20	-	SRAM
		M14*P1.5	145	16	Y	FOX
		M15*P1.5	150	20	-	SRAM

KT-204Y/KT-205Y

Weight:54g/61g



KT-258F/KT-259R

Weight:61g/66g



KT-206F/KT-207R

Weight:58g/116.5g



KT-204P/KT-205P

Weight:61g/66g



KT-260F/KT-261R

Weight:120g/160g



KT-204N/KT-205N

Weight:56g/61g



KT-202C/KT-203C

Weight:150g/213.5g



SPLINED TYPE

Loose Balls Type 8/9S:
KT-SB8-3:3 pawls
(Inner/outer seal included)
Weight:164g



SCREWING TYPE

Loose Balls Type:
KT-CB8:8/9S
KT-CB7:7S
(Inner/outer seal included)
Weight:184g



ALLOY CASSETTE BODY TYPE

Alloy cassette body for 4-5 seal bearing hubs
2 seal bearing
5 Pawls and 5 Spring
AL7075 Shimano 8/9/10/11 for MTB
AL7075 Sram 11/12 XD Driver for MTB



Cr-Mo CASSETTE BODY TYPE

Cr-Mo cassette body for 4-5 seal bearing hubs
2 seal bearing
3 Pawls and 1 Spring
Shimano 8/9/10/11 for MTB
Sram 11/12 XD Driver for MTB




FIXED GEAR HUBS PARTS SET

FG-14 for 14T sprocket
Available for 14~18T sprocket
Including Sprocket, Lock-ring & washer

NUTS

Color option:



Code:GO Code:YL Code:JO Code:G4 Code:M1 Code:FH Code:OL Code:N5 Code:CY Code:AT

- 淮安廠：明倫運動器材(淮安)有限公司
江蘇省淮安經濟技術開發區深圳東路289號 P.C.:223001
- H.A. Factory No.289, ShenZhen East Road, Huai An Economic and Technological Development Area, JiangSu Province
TEL:0086-(0)517-89897100 FAX:0086-(0)517-89897071
- 深圳辦公室/倉庫：深圳市光明新区公明鎮上村蓮塘工業區河堤路18號
S.Z. office / warehouse NO.18 Hedi Road,Shangcun Liantang Industial, Gongming Town, SHENZHEN, China
TEL：0086-(0)755-27726748
E-mail:kthub@kthub.com ktsales@kthub.com Web:www.ktgroup.net
- 昆山辦事處：江蘇省昆山市城北中路888號3号楼3樓
K.S. Office 3rd floor, 888 Chengbeizhong Road, Kunshan City, Jiangsu Province
TEL:0512-57760667 FAX:0512-50176248
E-mail:century-dream@163.com
- 浙江辦事處：浙江杭州市蕭山區原野汽配城8棟46號 P.C.:311200
Z.J. Office NO. 46 Building 8, YuanYe Auto Parts City XiaoShan District HangZhou City ZheJiang China
TEL:0086-571-82236146 FAX:0086-571-82652135
MOBILE:0086-13967153199
- 天津辦事處：中国北方自行车电动车城G1-212, 天津东丽区晋中街 P. C. 300300 D13
T.J.Office G1-212 Bicycle Electric Vehicle City, North China, Jinzhong Street, Dongli District, Tianjin
TEL：0086(0)22-26790586 FAX：0086(0)22-26790526
E-mail:kthub@yahoo.cn
- 台灣辦事處：42951台灣台中市神岡區庄前路28號
Taiwan Office No.28, Zhuangqian Rd., Shengang Dist., Taichung City 429, Taiwan (R.O.C.)
T:+886-4-2563-0919 F:+886-4-2563-0959
E-mail:leo@kthub.com
- 德國代理商：TAIMCO
Taimco e.K.
Bahnhofstraße 11
32105 Bad Salzufflen (Germany)
Germany Agent TEL:0049(0)5222-639715 FAX:0049(0)5222-366870
E-mail:service@taimcol.de Web:http://www.taimco.de/net
- 巴西代理商：Joy Tech Com. Imp. e Exp. Ltda.
Brazil Agent website: www.joytech.com.br
e-mail: contato@joytech.com.br